




FIESTA/OPERA WITH SELF-LATCHING 9600

Contents of Accessory box 1001-HRK	Contents of the Self-Latching box SKU # 9600	Opera Shell	Fiesta Shell
SCREW BAG 140-0008 A B C D E (1 IN.) x8 x8 x8 x16 x12 x4 x2 x2 x4 x1	SCREW BAG 140-0016 F G D C (2 1/2 IN.) x2 (2 1/2 IN.) x2 (3/4 IN.) x12 (1 1/2 IN.) x2 x3 x2 x4 Security straps		

⚠ WARNING


- ▶ Install the step on a flat surface.
- ▶ Do not jump or dive from the step or ladder.
- ▶ Remove the step from water when temperatures drop below freezing.
- ▶ In winter, the step should be stored in an area protected from snow.
- ▶ Never lift the step by its handrails.
- ▶ Use BATTERY operated tools to avoid electric shock near water.
- ▶ Ensure no corrosive materials are added to the step or hardware kit.
- ▶ The step must be installed per manufacturer's instructions.
- ▶ File off all stripped or sharp edges before assembly to avoid injuries and liner damage.
- ▶ The manufacturer is not responsible for damages or injuries caused by improper installation or use of product.
- ▶ To ease the installation of handrails and bolts, use a screwdriver to line up the holes.
- ▶ Maximum weight: 300 lbs / 135 kg.

Required tools (not included)

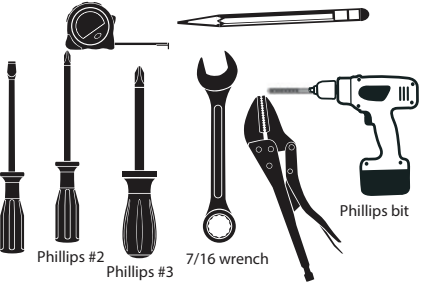

Phillips #2 Phillips #3 7/16 wrench Phillips bit


Also needed but not included

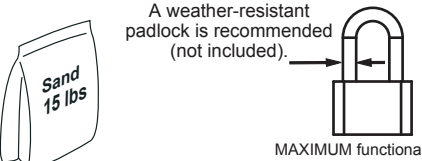

A weather-resistant padlock is recommended (not included).

Sand 15 lbs

MAXIMUM functional width is 1/4".

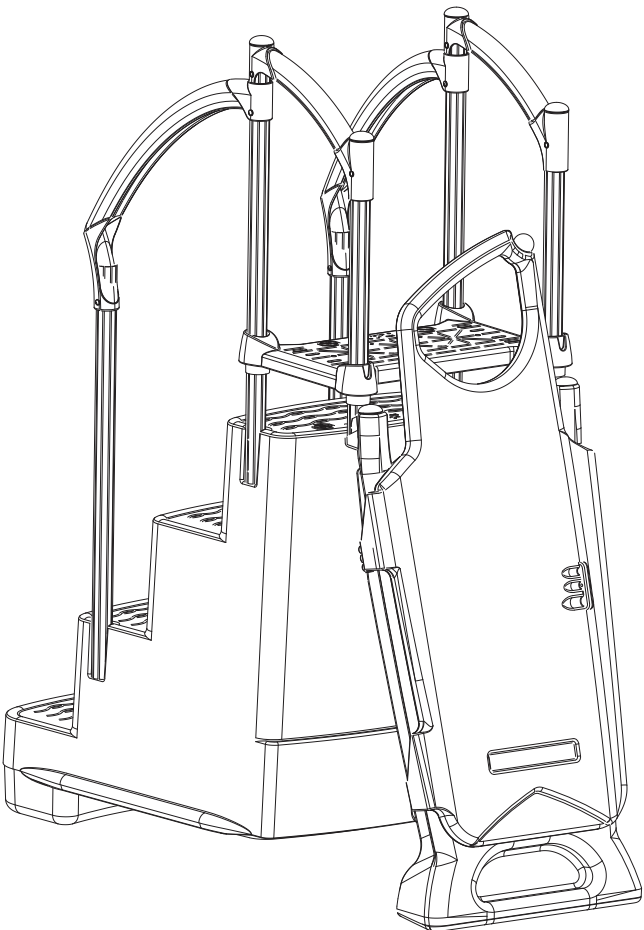

Fiesta with Self-Latching


A

1) Insert the four posts into the step and secure them in place with the bolts, washers, and nuts provided.

2) Insert the platform over the two rear posts. Do not secure.

3) Insert the small and large handrails as illustrated. Secure the large handrails with the screws provided. Leave the small handrails floating.

Useful tip!
To ease the installation of handrails and bolts, use a Phillips screwdriver to line up the holes.

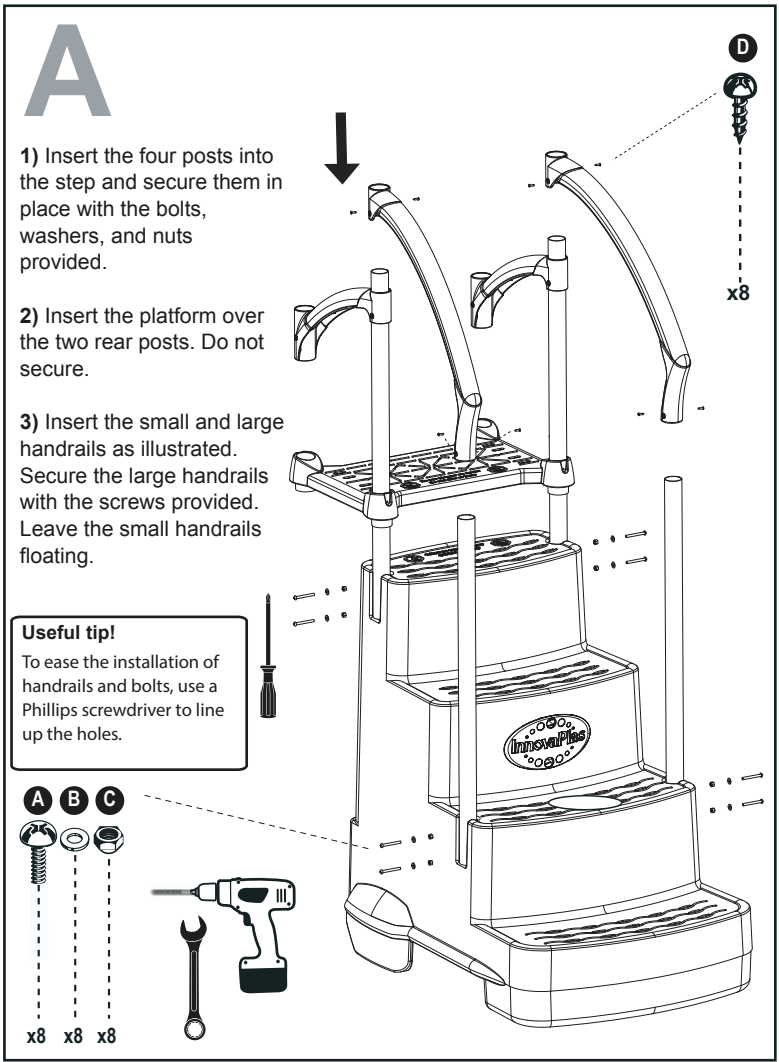

A B C

x8 x8 x8

D

x8


MANUFACTURER WARRANTY

1 year on step and closure.
1 year on hardware.

FIESTA/OPERA WITH SELF-LATCHING 9600

B

1) Insert the four Step Cups into the holes under the step.*

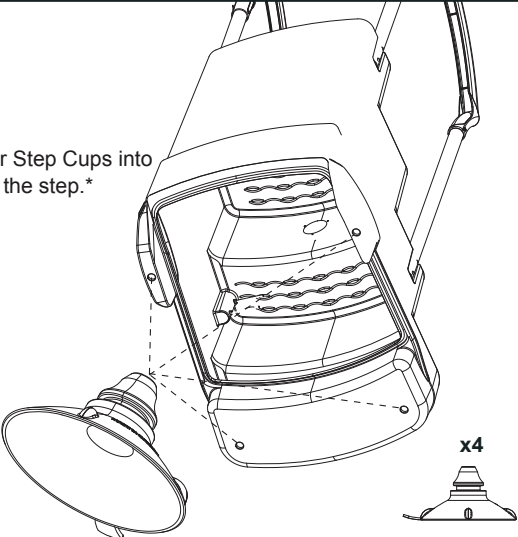


* View step cups installation tips on YouTube:
<https://www.youtube.com/watch?v=W5RH1VNxpu0>

B1) Insert half of the Step Cup mushroom ring in the hole, at a 45 degree angle.



B2) With a flat screwdriver, compress the Step Cup mushroom ring while pushing it into the hole.

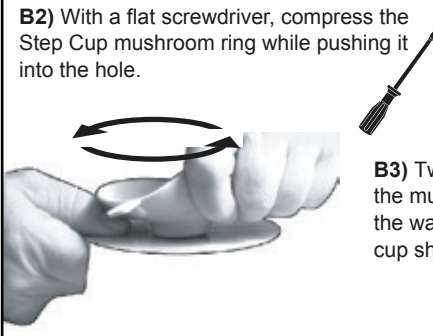

B3) Twist the Step Cup to ensure that the mushroom ring has entirely cleared the wall thickness. If it has, the suction cup should rotate freely




CAUTION


Failing to install the Step Cup™ system will greatly reduce the steadiness of the step and will void the manufacturer warranty.

C


1) Fill the ballast with sand. The approximate weight should be 15 lbs.



2) Screw the lid in place and align the cover ribs with the holes in the ballast base.



3) Fasten the cover to the ballast base with the four screws provided.

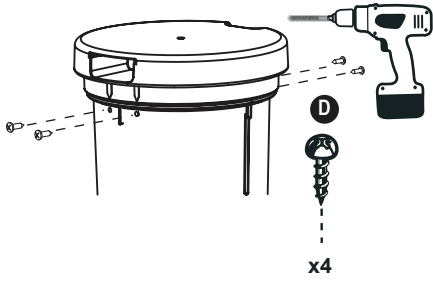


D

1) Slowly submerge the step into the pool. Make sure you do not damage the pool liner in the process.

2) Angle the whole step so that it is entirely under water. Purge all the air from under the steps.


3) Drop the ballast in the step hole.

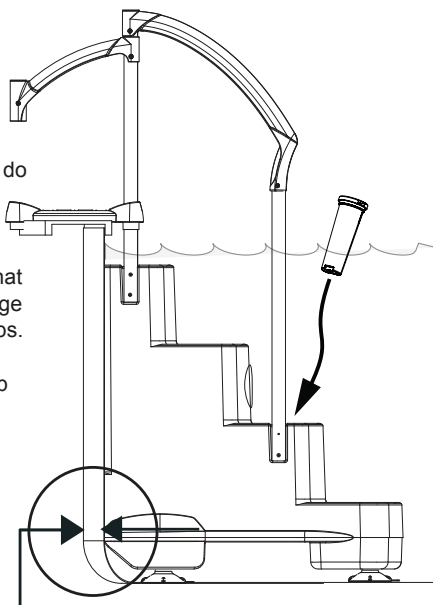


***MINIMUM 1"**

E

1) Once the step is in the pool secure the platform to the top seat (see illustration) using the two straps provided.

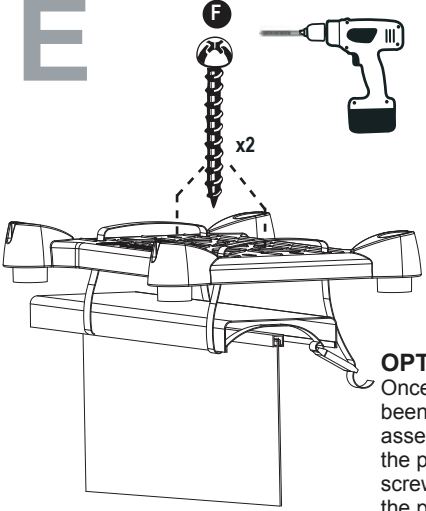

OPTIONAL: Once the pool step has been completely assembled and secured to the pool, attach the two screws supplied through the platform to the top seat of your pool to provided a more rigid assembly.






CAUTION

To prevent pool liner puncture, keep a minimum 1" gap between the pool liner and the rear underside of the step.

MANUFACTURER WARRANTY

1 year on step and closure.
1 year on hardware.

FIESTA/OPERA WITH SELF-LATCHING 9600

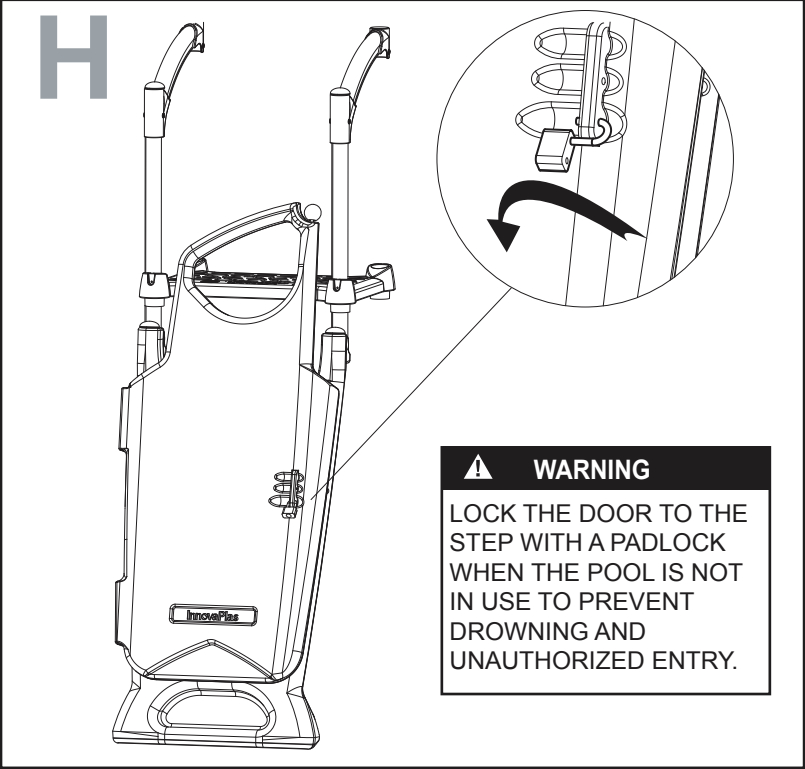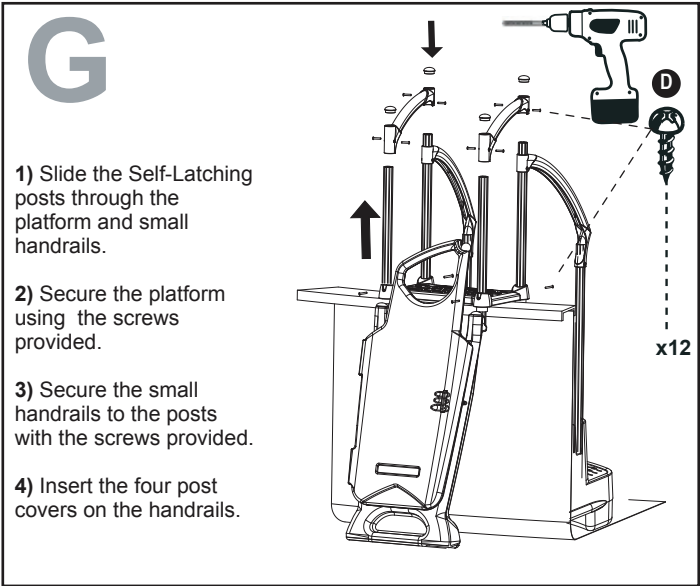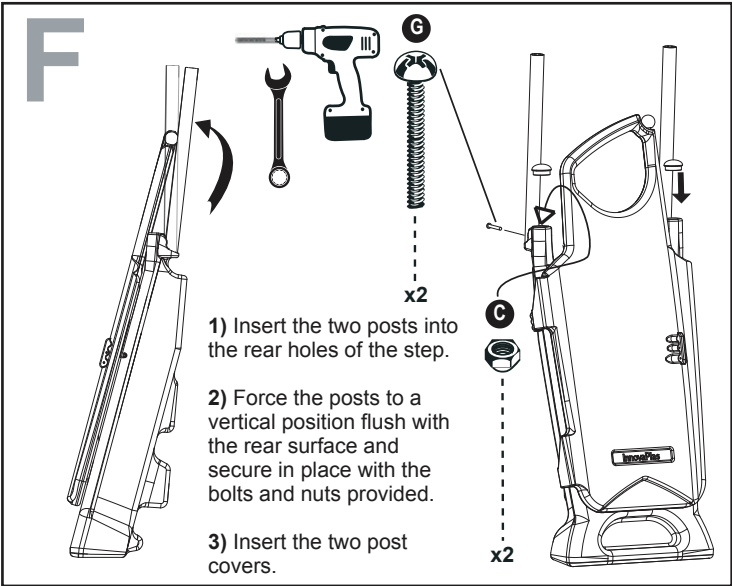

MANUFACTURER WARRANTY

1 year on step and closure.
1 year on hardware.