



PORTIÈRE «SELF-LATCHING» #9600

Contenu de la boîte Portière SKU # 9600

Outils requis

(non inclus)

KIT DE VIS 140-0016

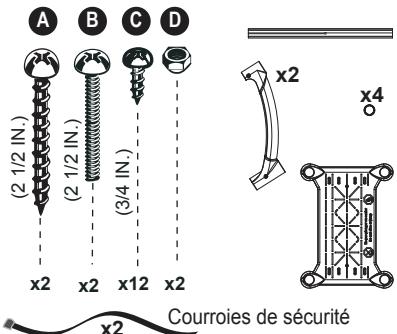

Un solide cadenas résistant aux intempéries est recommandé.





Diamètre MAXIMUM de la tige de 1/4".



Mèche Phillips

AVERTISSEMENT

- Installez la marche sur une base ferme.
- Ne pas plonger ou sauter de l'échelle.
- Retirez la marche de la piscine lorsque la température tombe sous le point de congélation.
- En hiver, la marche doit être storée à l'abri de la neige.
- Ne jamais soulever la marche par les rampes.
- Afin d'éviter tout risque de choc électrique, utilisez des outils à piles.
- Assurez-vous qu'aucun matériel corrosif n'est ajouté à la marche ou à la quincaillerie.
- La marche doit être installée selon les procédures d'installation du fabricant.
- Pour éviter toute blessure ou bris de toile, localisez et éliminez au moyen d'une lime toutes les arêtes vives ou coupantes des pièces de quincaillerie ou du plastique.
- Le fabricant n'est pas responsable des dommages ou blessures causés par une mauvaise installation ou une utilisation abusive.
- Pour faciliter l'installation des rampes et de la quincaillerie, utilisez un tournevis pour aligner les trous.
- **Poids maximum: 300 lbs / 135 kg.**

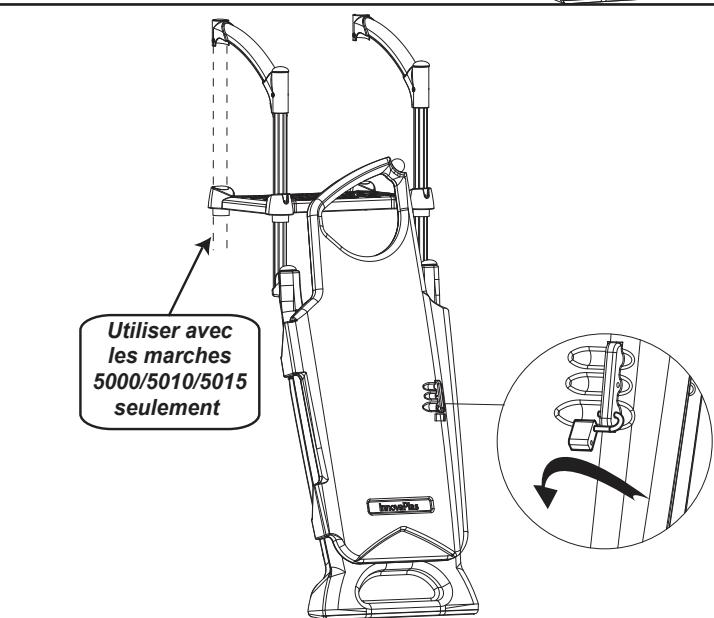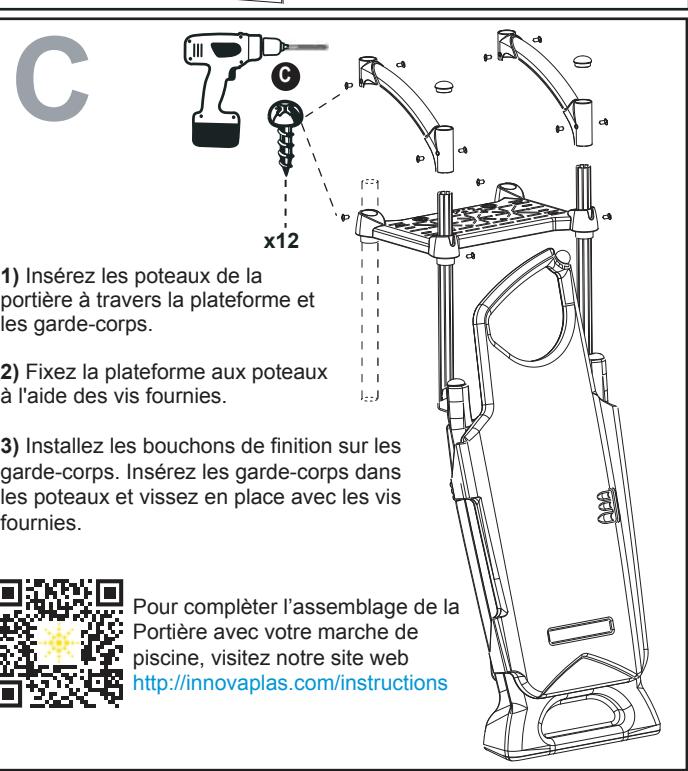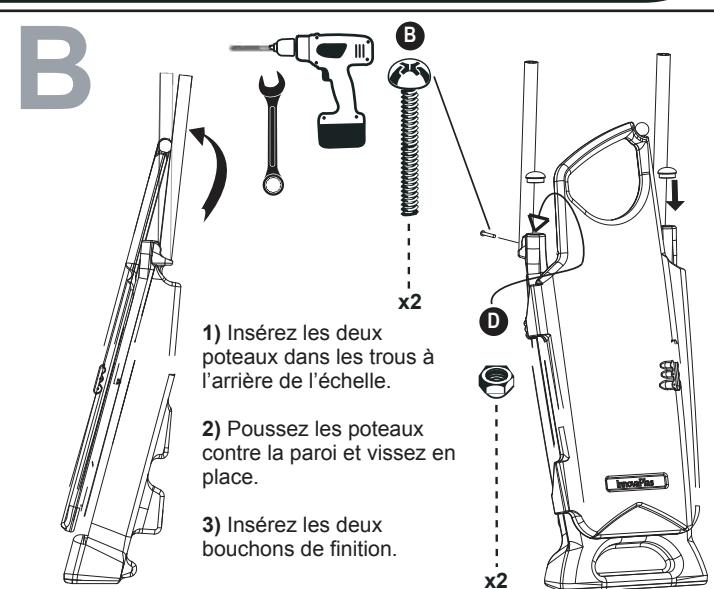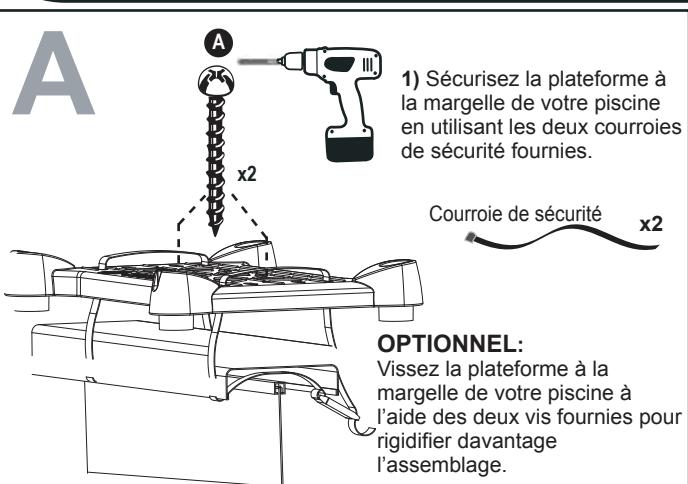

GARANTIE DU MANUFACTURIER

1 an sur la portière.
1 an sur la quincaillerie.



2257 route 139
Drummondville, Québec
J2A 2G2

WWW.INNOVAPLAS.COM


REV. 02/07/2023

PN:

PG:1

SELF-LATCHING #9600

Contents of Self-Latching box SKU # 9600

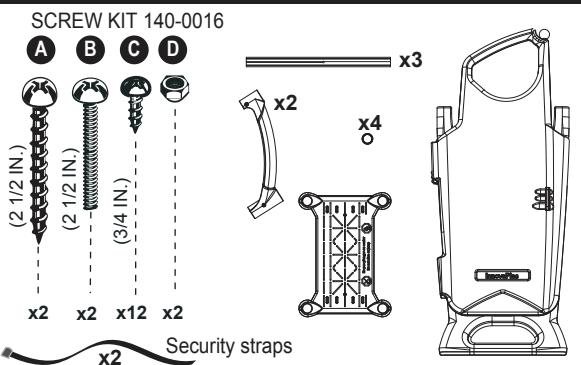


Tools required



(not included)

A weather-resistant padlock is recommended.


MAXIMUM functional width is 1/4".



! WARNING

- ▶ Install the step on a flat surface.
- ▶ Do not jump or dive from the step or ladder.
- ▶ Remove the step from water when temperatures drop below freezing.
- ▶ In winter, the step should be stored in an area protected from snow.
- ▶ Never lift the step by its handrails.
- ▶ Use BATTERY operated tools to avoid electric shock near water.
- ▶ Ensure no corrosive materials are added to the step or hardware kit.
- ▶ The step must be installed per manufacturer's instructions.
- ▶ File off all stripped or sharp edges before assembly to avoid injuries and liner damage.
- ▶ The manufacturer is not responsible for damages or injuries caused by improper installation or use of product.
- ▶ To ease the installation of handrails and bolts, use a screwdriver to line up the holes.
- ▶ **Maximum weight: 300 lbs / 135 kg.**

A

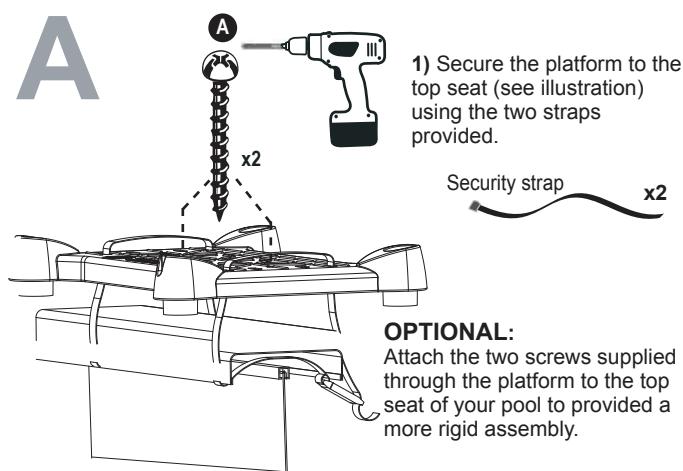


- 1) Secure the platform to the top seat (see illustration) using the two straps provided.

Security strap x2

OPTIONAL:
Attach the two screws supplied through the platform to the top seat of your pool to provide a more rigid assembly.

B

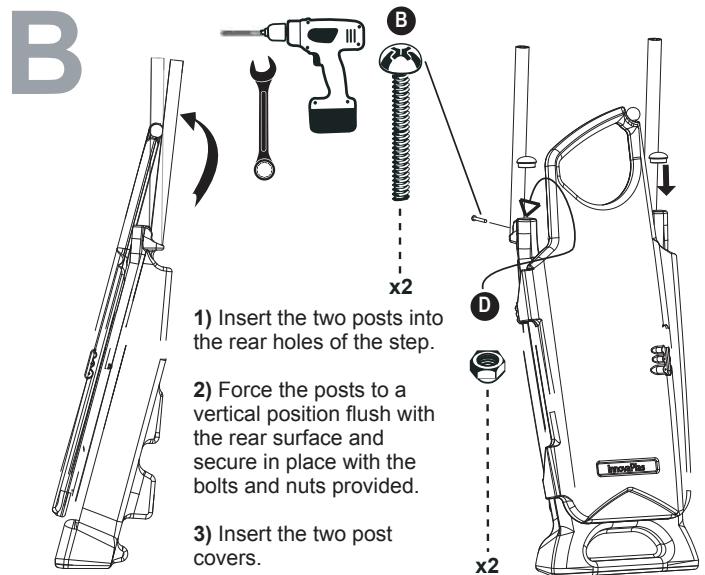


- 1) Insert the two posts into the rear holes of the step.

- 2) Force the posts to a vertical position flush with the rear surface and secure in place with the bolts and nuts provided.

- 3) Insert the two post covers.

C

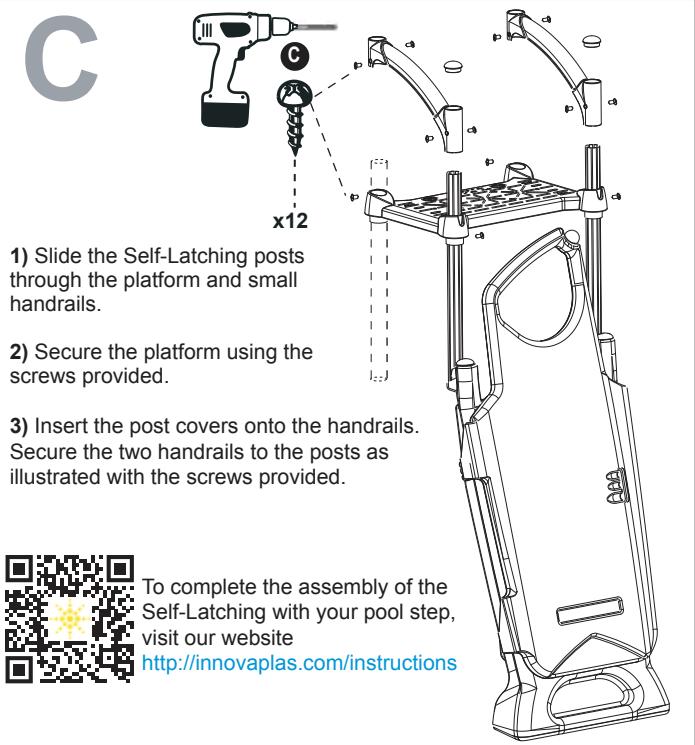


- 1) Slide the Self-Latching posts through the platform and small handrails.

- 2) Secure the platform using the screws provided.

- 3) Insert the post covers onto the handrails. Secure the two handrails to the posts as illustrated with the screws provided.



To complete the assembly of the Self-Latching with your pool step, visit our website
<http://innovaplas.com/instructions>

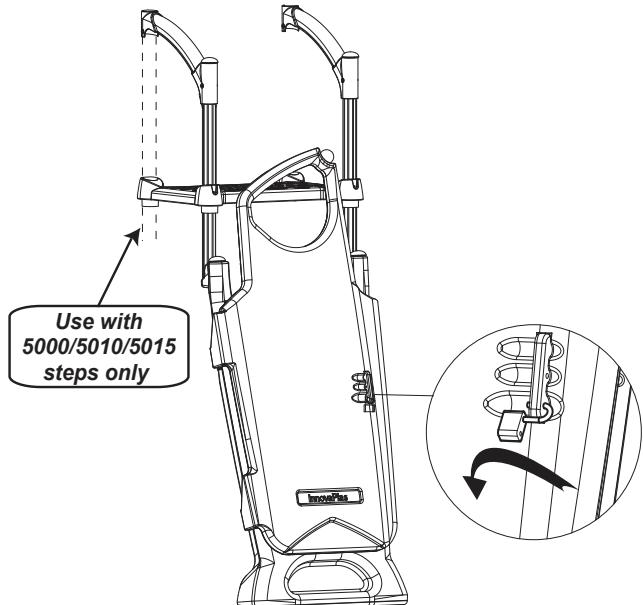

MANUFACTURER WARRANTY

1 year on self-latching gate.
1 year on hardware.



2257 route 139
Drummondville, Québec
J2A 2G2

WWW.INNOVAPLAS.COM

REV. 02/07/2023

PN:

PG:1